

# WRT4826WH

## EPA Wood Burning Fireplaces Specifications



Cat. #	Model	Description
F1795	WRT4826WH	EPA Wood-Burning Fireplace

Product Reference Information	
Weight	385 lbs
Height	45"
Width	38"
Depth	24-1/2"
Chimney Weight ASHT+* (7" dia.)	7.8 lb/ft.
Chimney Weight ACBI* (8" dia.)	3.75 lb/ft.
Chimney weight DTC** (7" dia.)	7.8 lb/ft.

\*Available from Security Chimneys™




\*\*Available from DuraVent®

FRAMING DIMENSIONS		
A	38-1/4"	972 mm
B	47-3/8"	1203 mm
C	30-1/8"	765 mm
D	15-1/8"	384 mm
E	77-1/8"	1959 mm
F	38-5/8"	981 mm
G	24"	610 mm
H	23"	504 mm
J	54-1/2"	1384 mm
K	8"	203 mm
L	1"	25 mm

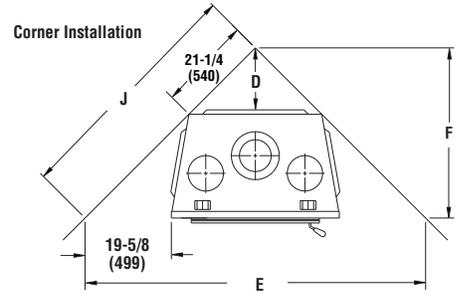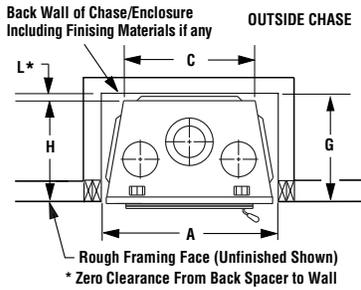


Framing Dimensions

Combustible materials can NOT be used in the space directly above the fireplace. Do not fill the space above the fireplace with any material (Except the wood framing)

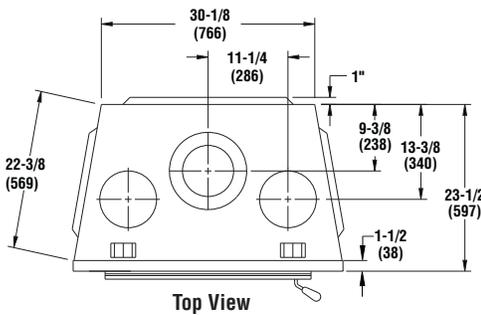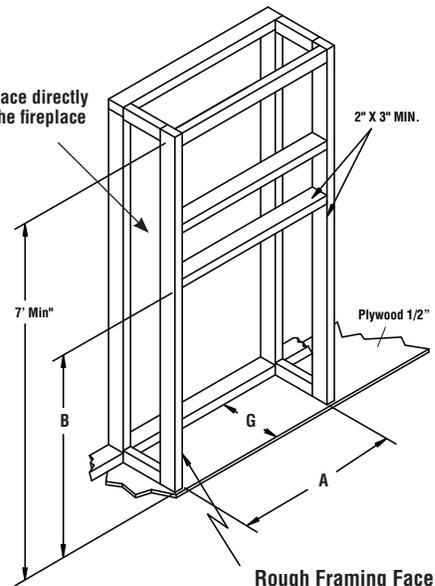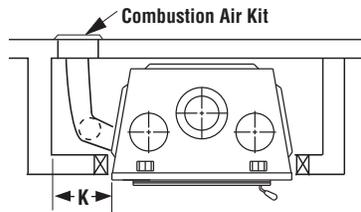

Top View

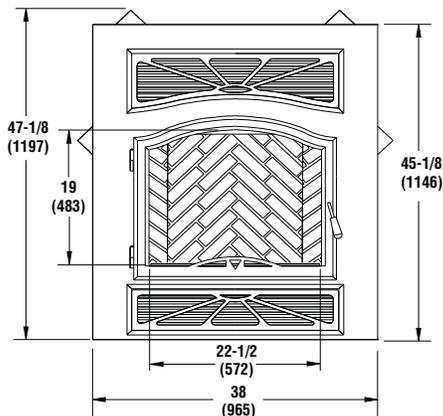

Front View

Inches (millimeters)

Fireplace Dimensions

Listing Information

Notes
Diagrams, illustrations and photographs are not to scale – consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.
All framing dimensions calculated for 1/2" dry wall at the fireplace face. If sheathing the chase or finishing with other thickness materials, calculations will need to be made.
The fireplace must not be in contact with any insulation or loose filling material. Cover the insulation with Drywall panels around the fireplace.



Report No. 14-197

Listed to ULC-S610 & UL-127


EPA certification test emission value 4.1 g/hr per 2015 standard

# WRT4826WH

## EPA Wood Burning Fireplaces Specifications

Typical Installations

### ACBI CHIMNEY INSTALLATION

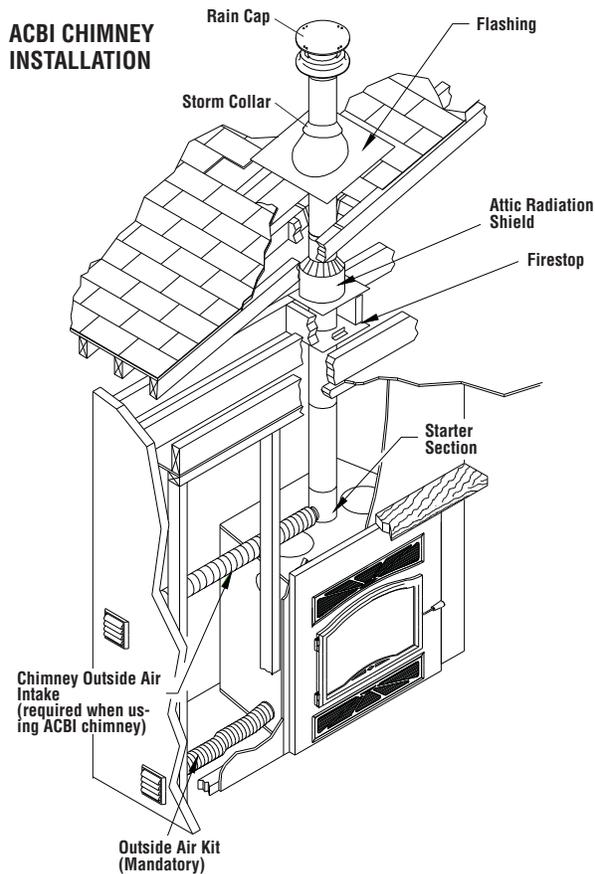


Universal Support With Strap Attached To Joist  
Storm Collar  
Flashing

Attic Radiation Shield

Floor, Ceiling & Wall

**NOTE:** It is recommended that the chase walls and floor be insulated in the same manner, using the same insulation, as the rest of the building, below the attic.

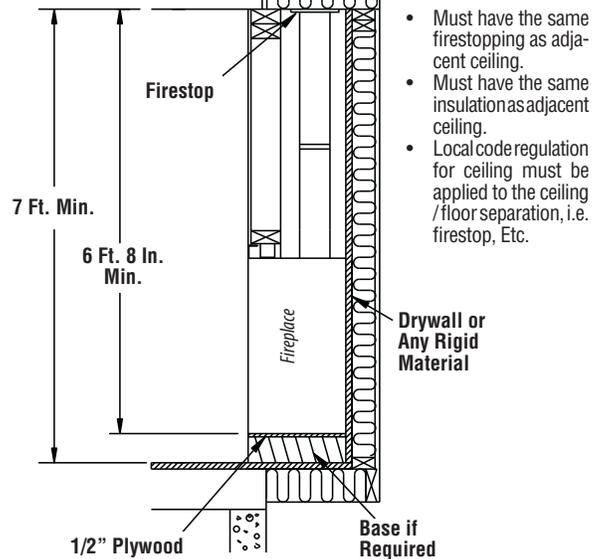

- Must have the same firestopping as adjacent ceiling.
- Must have the same insulation as adjacent ceiling.
- Local code regulation for ceiling must be applied to the ceiling / floor separation, i.e. firestop, Etc.

### CLEARANCE TO COMBUSTIBLES

The following clearances meet the minimum requirements for a safe installation:

**Side wall:** 24" (610 mm) measured from the doors edge

**Ceiling:** 6' 8" (2032 mm) measured from the base of the fireplace

#### Fireplace enclosure:

- Bottom:** 0"
- Side:** 0" to spacer
- Back:** 0" to spacer
- Top:** Do not fill the space above the fireplace with any material (7 feet measured from the base of the fireplace)

#### Chimney:

- ASHT+ \*: 2" (51mm)
- DuraTech® DTC \*\*: 2" (51mm)
- ACBI \*: 1" (26mm) at ceiling/roof level and 2" (51mm) through a wall

**Approved Chimney Types:** Use only with listed 7" Diameter Chimney, certified models ASHT+ \*, S-2100+ \*, HT6000+ \*, HT6103+ \*, ACBI \*, or DuraTech® DTC \*\* Chimney.

**Mantel:** 54" (1372 mm) measured from the base of the fireplace or 48" (1219) when installed with Clean Face Panel option (BPCF) and Gravity Air Kit

\*Available from Security Chimneys™

\*\*Available from DuraVent®

Combustible Clearances

